


RS 150 - 470 m³/h

TECHNICAL DATASHEET

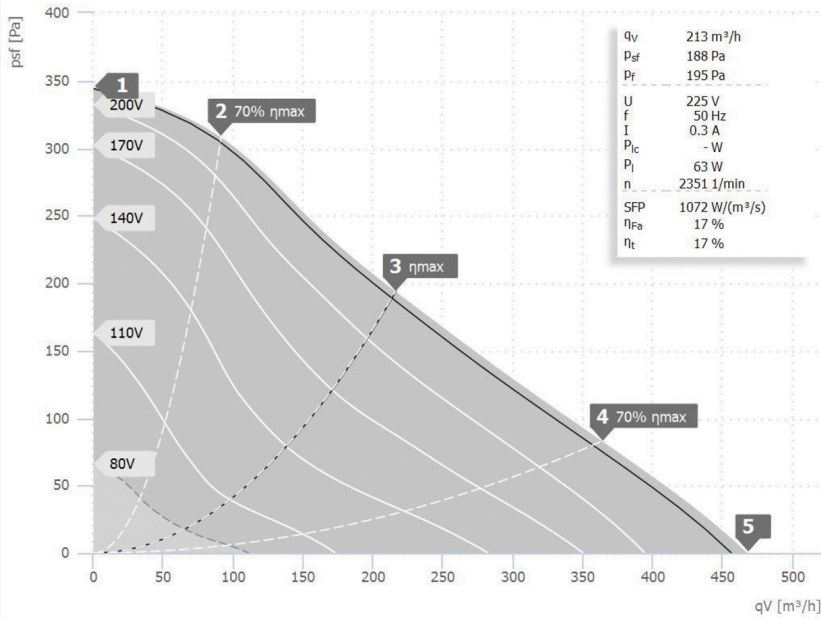

nur außerhalb der EU verfügbar
only available outside the EU

- Backward curved centrifugal fan
- Metal housing RAL 7035
- Speed controllable
- Integrated thermostatic switch
- Incl. terminal box

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,3	0,3	0,3
Power Consumption P ₁	W	60	62	65	67	66
RPM n	1/min	2708	2621	2377	2331	2405
SPL inlet L _{WA5}	dB(A)	60	60	61	62	65
SPL outlet L _{WA6}	dB(A)	61	61	61	62	64
SPL casing break out L _{WA2}	dB(A)	52	52	52	51	52

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	60	32	42	48	54	55	54	53	44
Outlet	L _{WA6}	61	33	44	54	52	55	54	50	42
Casing	L _{WA2}	51	32	31	39	41	45	46	45	34

RS 150 104196	
Voltage U _N	230 V 1~
Current I _{max}	0,3
Ambient Temperature t _A	60 °C
Medium temperatures t _M	60 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	2,7 kg

